

Series
NK



Duct electric heater

Series
NK..U



Duct electric heater with heating capacity from 3.0 kW up to 9.0 kW and an integrated control unit

Duct electric heater with heating capacity from 0.6 kW up to 2.4 kW and an integrated temperature controller

■ Applications

Duct electric heater are designed for supply air heating in round duct ventilating system. The heaters are applied in heating, ventilation and air conditioning systems for various premises.

■ Design

The casing and the terminal box are made of galvanized steel and the heating elements are of stainless steel. The heaters are equipped with rubber seals for connection to the air ducts.

NK duct heaters are equipped with two overheating protection thermostats:

- ▶ basic protection with automatic restart with +50 °C operating temperature. After cooling the thermostat closes the control circuit of the heater automatically.

- ▶ emergency protection with manual restart (operating temperature +90 °C). In case of response the power supply to the heater is allowed after the manual emergency reset only.

- ▶ the thermostat contacts are located in the terminal box for external connection.

Each standard size has several electric capacity options. The higher capacity can be attained by means of installation of the heaters in series. All the three phase

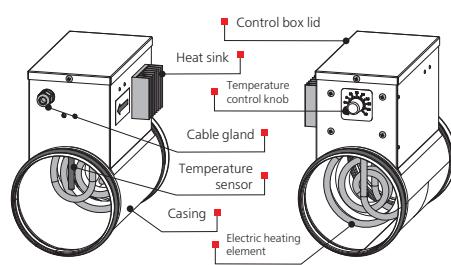
heaters have star connection.

■ Duct electric heater with integrated temperature control

The NK heaters are available in modifications:

- ▶ NK..U with heating capacity from 0.6 up to 2.4 kW equipped with an integrated temperature controller
- ▶ NK..U with heating capacity from 3.0 up to 9.0 kW equipped with a control unit.


■ Design of NK..U duct heater with heating capacity from 0.6 kW up to 2.4 kW and an integrated temperature controller



The temperature control knob with temperature range from -10 °C up to +40 °C is placed on the control box front panel. The NK..U heater is equipped with a built-in temperature sensor located inside of the air duct.

The thermal switch with manual reset actuated at +60 °C is used for the thermal overheat protection.

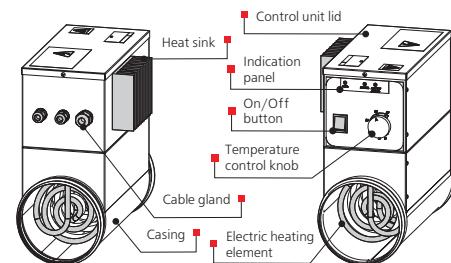■ Design of NK..U duct heater with heating capacity from 3.0 kW up to 9.0 kW and an integrated control unit



The NK..U model with a control unit is equipped with a triac power control unit. Power control is effected by means of switching on/off the maximum load commutated by the semiconductor device that is free of any mechanical wear parts. The load commutation starts at zero current and load to disable any magnetic field interferences.

The NK..U heater includes two overheat protection thermostats:

- ✓ the basic self-resetting overheat protection thermostat actuated at the temperature +50 °C.

Designation key:

Series	Air duct diameter, mm	-	Heater power [kW]	-	Phase	Options
NK	100; 125; 150; 160; 200; 250; 315	-	0,6; 0,8; 1,2; 1,6; 1,7; 2,0; 1,8; 2,4; 3,0; 3,4; 3,6; 5,1; 6,0; 9,0	-	1 – single phase 3 – three phase	U – integrated temperature control

After cooling the thermostat closes the heater control circuit.

✓ the emergency overheat protection thermostat with manual reset actuated at the temperature +90 °C. In case of the thermostat tripping power supply is resumed after manual alarm reset.

Operation logic options for the NK..U heater with a control unit:

- ✓ operation logic based on external temperature sensor readings to maintain set air temperature in the air duct.
- ✓ proportional electric heat control from 0 up to 100% with a 0-10 V control signal from the external controller.

The temperature is set with the integrated integrated temperature controller. Optionally, an external 0-10 V control signal from another control unit may be connected to the control unit, which corresponds to the air duct temperature -30 up to +30 °C. If operation mode is based on readings of external temperature sensor, the duct temperature sensors may be optionally installed (not included in the delivery set):

- ✓ KDT2-M1 duct temperature sensor enclosed in a protecting sleeve with a sensing tip, 100 up to 400 mm long
- ✓ KDT2-M duct temperature sensor enclosed in a protecting sleeve with a mounting flange, 100 up to 400 mm long
- ✓ KDT2-MK duct temperature sensor enclosed in a protecting sleeve with a mounting flange, 100 up to 400 mm long

■ Mounting

The heater design ensures its mounting on the round ducts in any position by means of clamps. The air flow direction shall match the pointer on the filter. The duct heaters can be installed in any position except for with the electric control unit below to prevent liquid penetration and wiring short circuit.

- The mounting shall be performed in such a way as to enable uniform air distribution along the entire cross section.
- The air filter shall be installed at heater inlet to protect the heating elements against pollution.
- The minimum distance between the heater and

other system elements is no less than two connecting diameters.

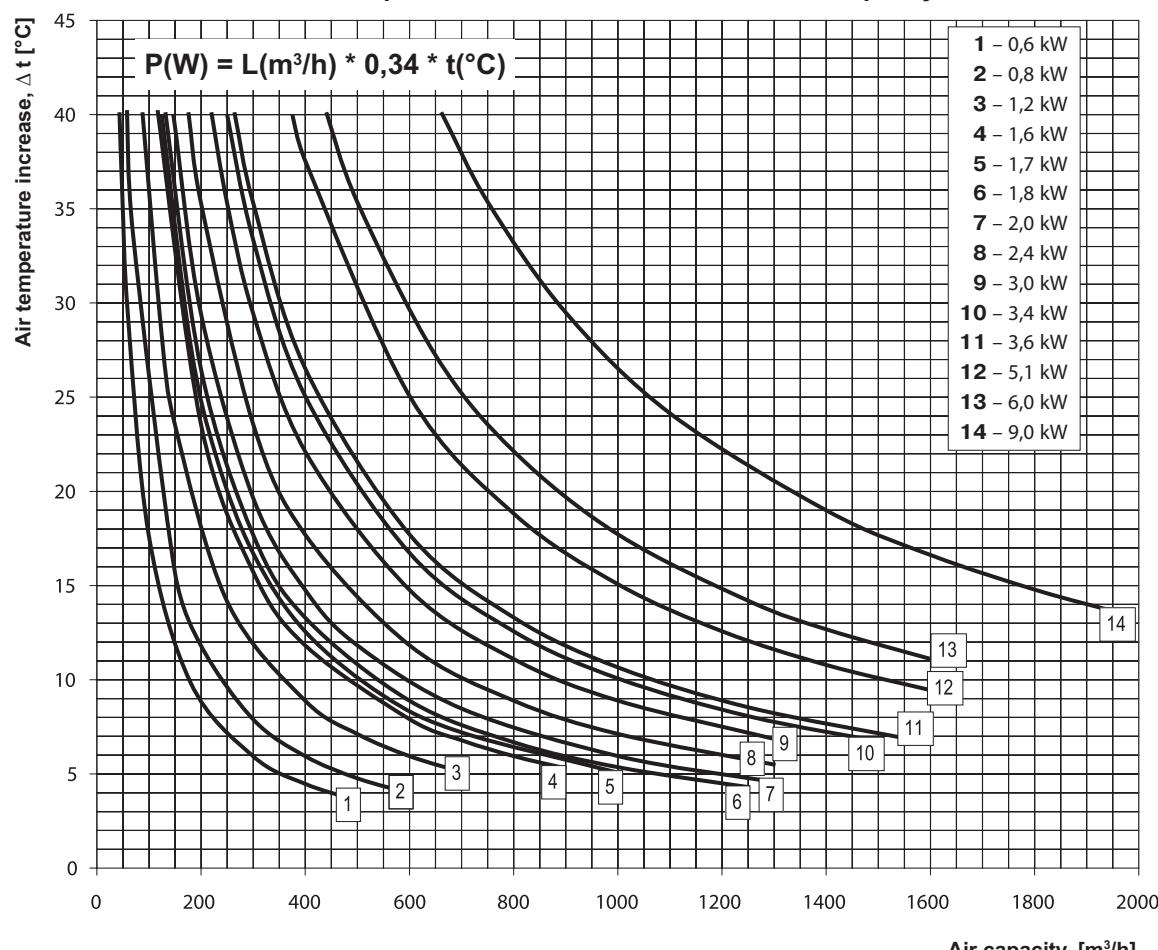
► The duct heaters are designed for minimum air flow speed 1.5 m/s and the maximum operating outlet temperature +40°C for NK and NK..U heaters with heating capacity from 0.6 up to 2.4 kW and maximum temperature +30°C for NK..U heaters with heating capacity from 3.0 up to 9.0 kW. In case of speed control option ensure the minimum air flow through the heater.

- Power supply to the heater shall be disabled if the fan is not running.
- To ensure the correct and safe heater operation he automation system can be applied to ensure the complex control and protection:

- ✓ automatic control of heating elements capacity and air heating temperature;
- ✓ checking filter condition by means of differential pressure sensor;
- ✓ power supply disabling in case of supply fan shutdown or airflow speed decrease as well as in case of the built-in overheating thermostats operation;
- ✓ shutoff of ventilating system with blowing electrical heating elements.

NK

Air temperature increase as a function of air capacity









HEATER

NK
HEATER

HEATERS

Technical data:

Type	Minimum air capacity [m³/h]	Current [A]	Voltage [V]	Power [kW]	Number of heating coils x capacity [kW]	Phase
NK 100-0,6-1 / NK 100-0,6-1 U	60	2.6		0.6	1 x 0.6	1
NK 100-0,8-1 / NK 100-0,8-1 U	80	3.5		0.8	1 x 0.8	1
NK 100-1,2-1 / NK 100-1,2-1 U	90	5.2		1.2	2 x 0.6	1
NK 100-1,6-1 / NK 100-1,6-1 U	120	7.0		1.6	2 x 0.8	1
NK 100-1,8-1 / NK 100-1,8-1 U	130	7.8		1.8	3 x 0.6	1
NK 125-0,6-1 / NK 125-0,6-1 U	60	2.6		0.6	1 x 0.6	1
NK 125-0,8-1 / NK 125-0,8-1 U	80	3.5		0.8	1 x 0.8	1
NK 125-1,2-1 / NK 125-1,2-1 U	90	5.2	1~230	1.2	2 x 0.6	1
NK 125-1,6-1 / NK 125-1,6-1 U	120	7.0		1.6	2 x 0.8	1
NK 125-2,4-1 / NK 125-2,4-1 U	150	7.8		2.4	3 x 0.8	1
NK 150-1,2-1 / NK 150-1,2-1 U	120	5.2		1.2	1 x 1.2	1
NK 150-1,7-1 / NK 150-1,7-1 U	130	7.4		1.7	1 x 1.7	1
NK 150-2,0-1 / NK 150-2,0-1 U	140	8.7		2.0	1 x 2.0	1
NK 150-2,4-1 / NK 150-2,4-1 U	150	10.4		2.4	2 x 1.2	1
NK 150-3,4-1 / NK 150-3,4-1 U	220	14.7		3.4	2 x 1.7	1
NK 150-3,6-3 / NK 150-3,6-3 U	265	5.2		3.6	3 x 1.2	3
NK 150-5,1-3 / NK 150-5,1-3 U	320	7.4	3~400	5.1	3 x 1.7	3
NK 150-6,0-3 / NK 150-6,0-3 U	360	8.7		6.0	3 x 2.0	3
NK 160-1,2-1 / NK 160-1,2-1 U	150	5.2		1.2	1 x 1.2	1
NK 160-1,7-1 / NK 160-1,7-1 U	160	7.4		1.7	1 x 1.7	1
NK 160-2,0-1 / NK 160-2,0-1 U	170	8.7	1~230	2.0	1 x 2.0	1
NK 160-2,4-1 / NK 160-2,4-1 U	180	10.4		2.4	2 x 1.2	1
NK 160-3,4-1 / NK 160-3,4-1 U	250	14.8		3.4	2 x 1.7	1
NK 160-3,6-3 / NK 160-3,6-3 U	265	5.2		3.6	3 x 1.2	3
NK 160-5,1-3 / NK 160-5,1-3 U	375	7.4	3~400	5.1	3 x 1.7	3
NK 160-6,0-3 / NK 160-6,0-3 U	440	8.7		6.0	3 x 2.0	3
NK 200-1,2-1 / NK 200-1,2-1 U	150	5.2		1.2	1 x 1.2	1
NK 200-1,7-1 / NK 200-1,7-1 U	160	7.4		1.7	1 x 1.7	1
NK 200-2,0-1 / NK 200-2,0-1 U	170	8.7	1~230	2.0	1 x 2.0	1
NK 200-2,4-1 / NK 200-2,4-1 U	180	10.4		2.4	2 x 1.2	1
NK 200-3,4-1 / NK 200-3,4-1 U	250	14.8		3.4	2 x 1.7	1
NK 200-3,6-3 / NK 200-3,6-3 U	265	5.2		3.6	3 x 1.2	3
NK 200-5,1-3 / NK 200-5,1-3 U	375	7.4	3~400	5.1	3 x 1.7	3
NK 200-6,0-3 / NK 200-6,0-3 U	440	8.7		6.0	3 x 2.0	3
NK 250-1,2-1 / NK 250-1,2-1 U	180	5.2		1.2	1 x 1.2	1
NK 250-2,0-1 / NK 250-2,0-1 U	200	8.7		2.0	1 x 2.0	1
NK 250-2,4-1 / NK 250-2,4-1 U	265	10.4	1~230	2.4	2 x 1.2	1
NK 250-3,0-1 / NK 250-3,0-1 U	375	13.0		3.0	1 x 3.0	1
NK 250-3,6-3 / NK 250-3,6-3 U	375	5.2		3.6	3 x 1.2	3
NK 250-6,0-3 / NK 250-6,0-3 U	440	8.7	3~400	6.0	3 x 2.0	3
NK 250-9,0-3 / NK 250-9,0-3 U	660	13.0		9.0	3 x 3.0	3
NK 315-1,2-1 / NK 315-1,2-1 U	180	5.2		1.2	1 x 1.2	1
NK 315-2,0-1 / NK 315-2,0-1 U	200	8.7	1~230	2.0	1 x 2.0	1
NK 315-2,4-1 / NK 315-2,4-1 U	265	10.4		2.4	2 x 1.2	1
NK 315-3,6-3 / NK 315-3,6-3 U	375	5.2		3.6	3 x 1.2	3
NK 315-6,0-3 / NK 315-6,0-3 U	440	8.7	3~400	6.0	3 x 2.0	3
NK 315-9,0-3 / NK 315-9,0-3 U	660	13.0		9.0	3 x 3.0	3

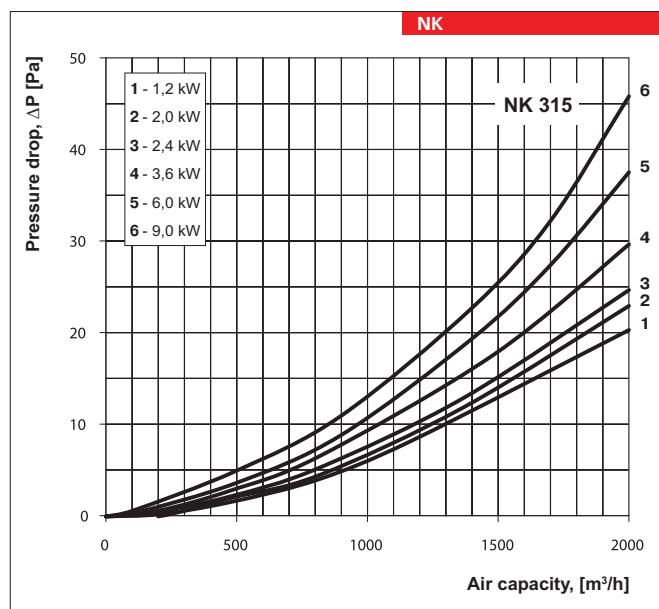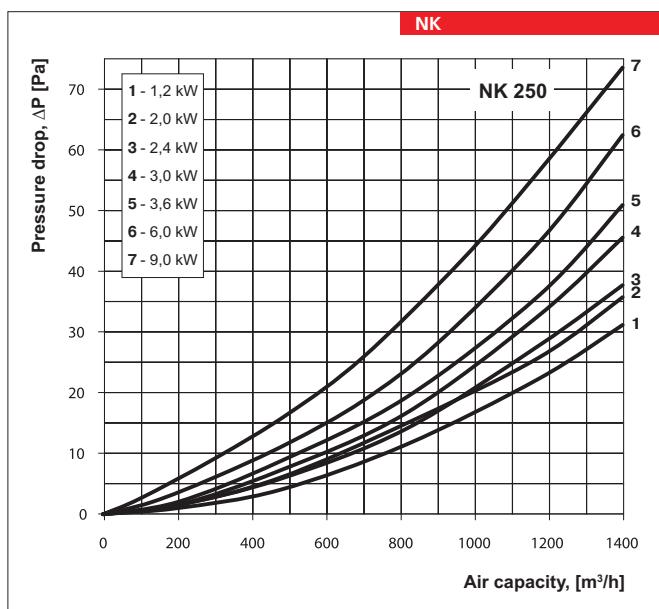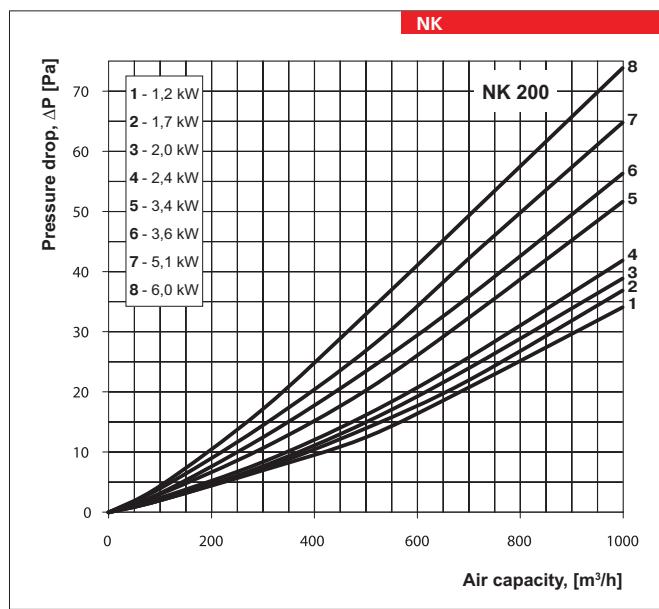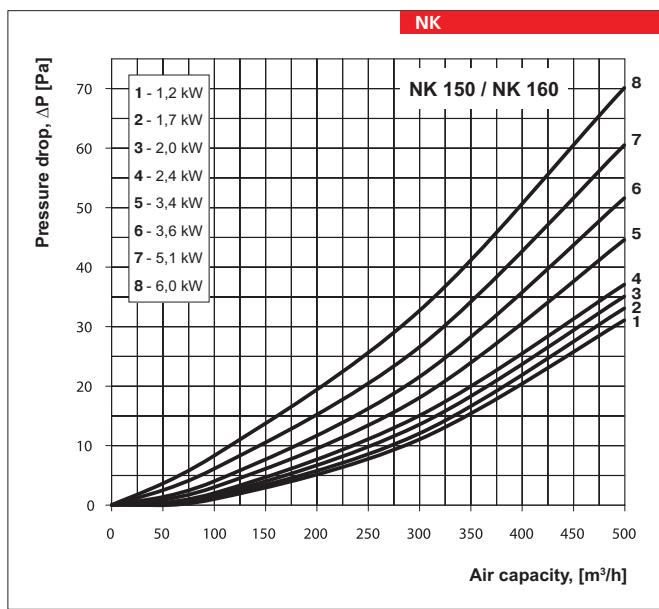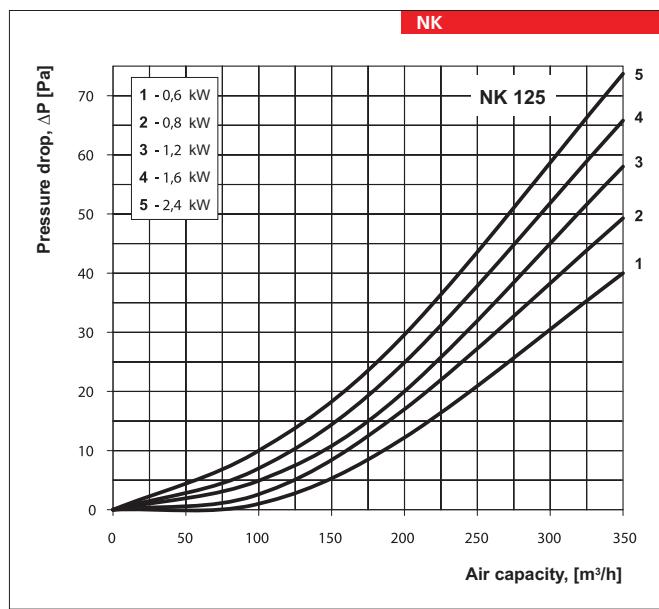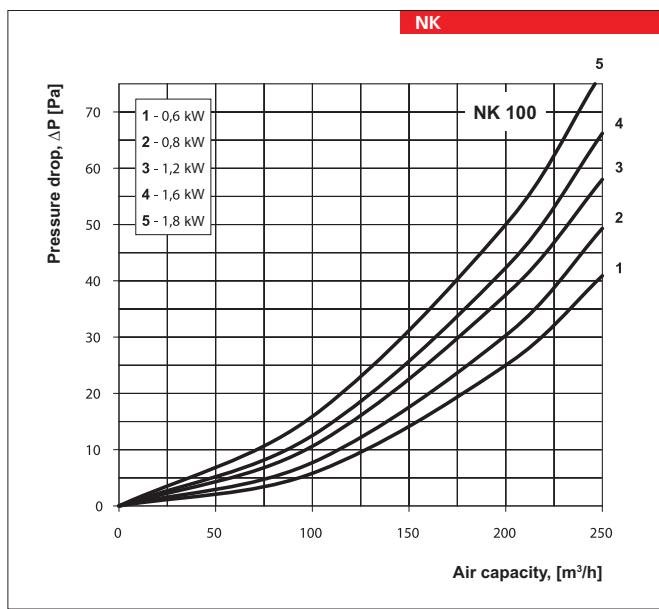
HEATER
NK
NK...U

HEATERS

Overall dimensions:

Type	Dimensions [mm]						Weight [kg]
	ØD	B	H	L	L1	L2	
NK-100-0.6-1	99	94	207	306	226	40	1.3
NK-100-0.8-1	99	94	207	306	226	40	1.3
NK-100-1.2-1	99	94	207	306	226	40	1.5
NK-100-1.6-1	99	94	207	306	226	40	1.5
NK-100-1.8-1	99	94	207	376	296	40	1.7
NK-125-0.6-1	124	103	230	306	226	40	1.4
NK-125-0.8-1	124	103	230	306	226	40	1.4
NK-125-1.2-1	124	103	230	306	226	40	1.7
NK-125-1.6-1	124	103	230	306	226	40	1.7
NK-125-2.4-1	124	103	230	376	296	40	1.9
NK-150-1.2-1	149	120	255	306	226	40	2.0
NK-150-1.7-1	149	120	255	306	226	40	2.0
NK-150-2.0-1	149	120	255	306	226	40	2.0
NK-150-2.4-1	149	120	255	306	226	40	2.4
NK-150-3.4-1	149	120	255	306	226	40	2.4
NK-150-3.6-3	149	120	255	376	296	40	2.8
NK-150-5.1-3	149	120	255	376	296	40	2.8
NK-150-6.0-3	149	120	255	376	296	40	2.8
NK-160-1.2-1	159	120	267	306	226	40	2.1
NK-160-1.7-1	159	120	267	306	226	40	2.1
NK-160-2.0-1	159	120	267	306	226	40	2.1
NK-160-2.4-1	159	120	267	306	226	40	2.5
NK-160-3.4-1	159	120	267	306	226	40	2.5
NK-160-3.6-3	159	120	267	376	296	40	3.0
NK-160-5.1-3	159	120	267	376	296	40	3.0
NK-160-6.0-3	159	120	267	376	296	40	3.0
NK-200-1.2-1	199	150	302	294	214	40	2.5
NK-200-1.7-1	199	150	302	294	214	40	2.5
NK-200-2.0-1	199	150	302	294	214	40	2.5
NK-200-2.4-1	199	150	302	294	214	40	3.0
NK-200-3.4-1	199	150	302	294	214	40	3.0
NK-200-3.6-3	199	150	302	376	296	40	3.5
NK-200-5.1-3	199	150	302	376	296	40	3.5
NK-200-6.0-3	199	150	302	376	296	40	3.5
NK-250-1.2-1	249	150	356	306	226	40	3.2
NK-250-2.0-1	249	150	356	306	226	40	3.2
NK-250-2.4-1	249	150	356	306	226	40	3.7
NK-250-3.0-1	249	150	356	306	226	40	3.2
NK-250-3.6-3	249	150	356	376	296	40	4.6
NK-250-6.0-3	249	150	356	376	296	40	4.6
NK-250-9.0-3	249	150	356	376	296	40	4.6
NK-315-1.2-1	313	150	425	294	214	40	4.0
NK-315-2.0-1	313	150	425	294	214	40	4.0
NK-315-2.4-1	313	150	425	294	214	40	4.8
NK-315-3.6-3	313	150	425	376	296	40	5.6
NK-315-6.0-3	313	150	425	376	296	40	5.6
NK-315-9.0-3	313	150	425	376	296	40	5.6



NK...U from 0.6 up to 2.4 kW with an integrated temperature controller

NK...U from 3.0 up to 9.0 with an integrated control unit



NK...U from 0.6 up to 2.4 kW with an integrated temperature controller

NK...U from 3.0 up to 9.0 with an integrated control unit

Overall dimensions:

Type	Dimensions [mm]					Weight [kg]	Fig. no.
	ØD	B	H	L	L1		
NK-100-0,6-1 U	99	94	204	306	227	1.5	1
NK-100-0,8-1 U	99	94	204	306	227	1.5	1
NK-100-1,2-1 U	99	120	204	370	290	1.6	1
NK-100-1,6-1 U	99	120	204	370	290	1.6	1
NK-100-1,8-1 U	99	120	204	454	374	1.8	1
NK-125-0,6-1 U	124	103	230	306	227	1.6	1
NK-125-0,8-1 U	124	103	230	306	227	1.6	1
NK-125-1,2-1 U	124	126	230	370	290	1.8	1
NK-125-1,6-1 U	124	126	230	370	290	1.8	1
NK-125-2,4-1 U	124	126	230	454	374	2	1
NK-150-1,2-1 U	149	144	255	306	226	2.1	1
NK-150-1,7-1 U	149	144	255	306	226	2.1	1
NK-150-2,0-1 U	149	144	255	306	226	2.1	1
NK-150-2,4-1 U	149	144	255	370	290	2.6	1
NK-150-3,4-1 U	149	187	340	370	298	4.3	2
NK-150-3,6-3 U	149	187	340	370	298	4.9	2
NK-150-5,1-3 U	149	187	340	370	298	4.9	2
NK-150-6,0-3 U	149	187	340	370	298	4.9	2
NK-160-1,2-1 U	159	154	267	306	226	2.2	1
NK-160-1,7-1 U	159	154	267	306	226	2.2	1
NK-160-2,0-1 U	159	154	267	306	226	2.2	1
NK-160-2,4-1 U	159	154	267	370	290	2.8	1
NK-160-3,4-1 U	159	187	350	370	298	4.6	2
NK-160-3,6-3 U	159	187	350	370	298	5.2	2
NK-160-5,1-3 U	159	187	350	370	298	5.2	2
NK-160-6,0-3 U	159	187	350	370	298	5.2	2
NK-200-1,2-1 U	199	174	302	306	228	2.6	1
NK-200-1,7-1 U	199	174	302	306	228	2.6	1
NK-200-2,0-1 U	199	174	302	306	228	2.6	1
NK-200-2,4-1 U	199	174	302	376	298	3.2	1
NK-200-3,4-1 U	199	237	389	376	298	5.2	2
NK-200-3,6-3 U	199	237	389	376	298	5.9	2
NK-200-5,1-3 U	199	237	389	376	298	5.9	2
NK-200-6,0-3 U	199	237	389	376	298	5.9	2
NK-250-1,2-1 U	249	174	356	376	298	3.3	1
NK-250-2,0-1 U	249	174	356	376	298	3.3	1
NK-250-2,4-1 U	249	174	356	376	298	3.9	1
NK-250-3,0-1 U	249	237	446	376	298	5.1	2
NK-250-3,6-3 U	249	237	446	376	298	6.6	2
NK-250-6,0-3 U	249	237	446	376	298	6.6	2
NK-250-9,0-3 U	249	237	446	376	298	6.6	2
NK-315-1,2-1 U	313	174	425	306	228	4.1	1
NK-315-2,0-1 U	313	174	425	306	228	4.1	1
NK-315-2,4-1 U	313	174	425	306	228	5	1
NK-315-3,6-3 U	313	237	514	376	298	7.4	2
NK-315-6,0-3 U	313	237	514	376	298	7.4	2
NK-315-9,0-3 U	313	237	514	376	298	7.4	2

