


**MVMA
Series**

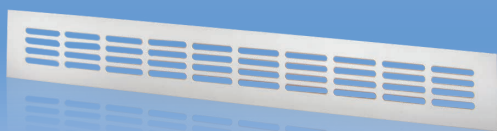

Application

- Mounting in door leaves of bathrooms, kitchens, etc.
- Suitable for installation into window sills for correct warm air distribution from radiators.
- Used to arrange correct air circulation in premises.


Design

- Made of polymer-coated or galvanized steel and are suitable for painting in various colours.
- Fixing with lugs.
- Modifications with a protecting insect screen are available.
- Minimum door leaf thickness is 32 mm.

Grille modifications

- **MVMA...An** – grilles from anodized aluminium
- **MVMA...«colour code»** – colourful polymer painted models.
- **MVMA...s** – models from aluminium with a protecting insect screen.
- **MVMA...s An** – models from anodized aluminium and a protecting insect screen.

Colour modifications



Overall dimensions

Model	Dimensions, [mm]		Air pass, [m ²]
	L	H	
MVMA 400x60	400	60	0.0062
MVMA 400x80	475	80	0.0093
MVMA 400x100	400	100	0.0120
MVMA 480x80	480	80	0.0120
MVMA 500x60	500	60	0.0078
MVMA 500x80	500	80	0.0120
MVMA 500x100	500	100	0.0156
MVMA 600x60	600	60	0.0093
MVMA 600x80	600	80	0.0140
MVMA 600x100	600	100	0.0186
MVMA 800x60	800	60	0.0120
MVMA 800x80	800	80	0.0186
MVMA 800x100	800	100	0.0248
MVMA 1000x60	1000	60	0.0160
MVMA 1000x80	1000	80	0.0256
MVMA 1000x100	1000	100	0.0326

