


Series DPp

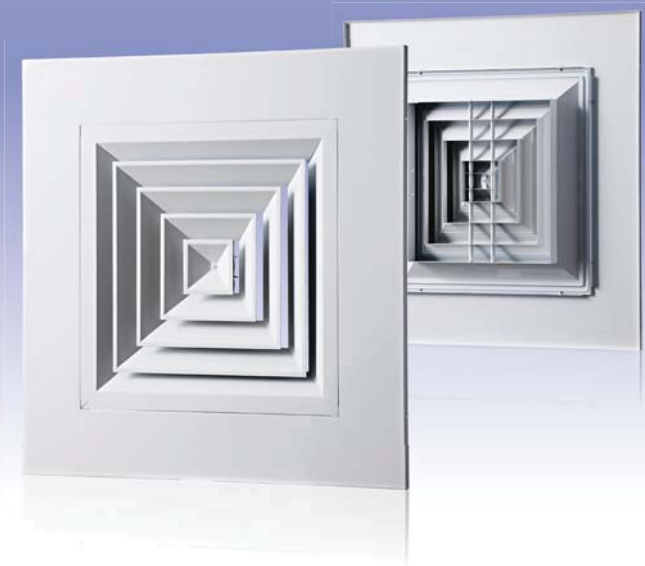

Ceiling diffuser with fixed vanes

Application

- Supply and exhaust ventilation, heating and air conditioning networks in industrial, commercial and domestic premises.

Design

- Made of high-quality extruded aluminium.
- Four-sided uniform air flow distribution.
- Ideal solution for installation into the Armstrong suspended ceilings.
- Polymer or anodized grille coating ensures weather-resistant properties.
- Non-standard sizes may be ordered.


Modifications

- Available modifications with an air flow regulator (R) and an adapter (A) for connection to air ducts, page 42.

Standard size [mm] and air pass [m²]

A	B	Air pass [m ²]			
595	140	0,014			
595	215		0,034		
595	290			0,053	
595	365				0,084

Pressure loss and sound power level

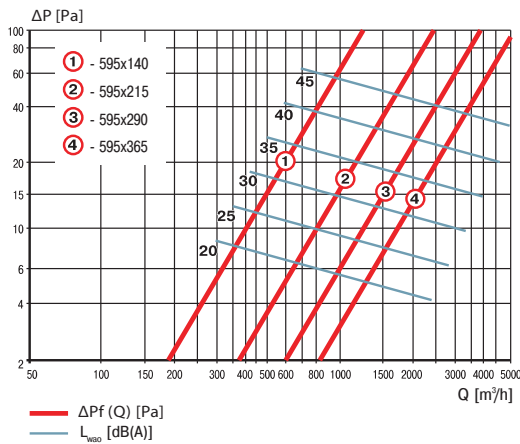

Designation:

ΔP – pressure loss [Pa]

Q – air capacity [m³/h]

L_{WA} – sound power level [dB(A)]

Order code



Grille type:

Dpp – ceiling diffuser

Grille size:

A – outer size [mm]

V – cross section size [mm]

Grille coating:

"___" – colour* (white by default)
"Anodized"

Accessories:

___ – no
R – air flow regulator
A – adapter

* Standard polymer coating colours:



Overall and mounting dimensions

